

**(54) MAGNETIC HEAD**

(11) 63-193319 (A) (43) 10.8.1988 (19) JP


(21) Appl. No. 62-25956 (22) 6.2.1987

(71) FUJI ELECTROCHEM CO LTD (72) KOJI MATSUDA(2)



(51) Int. Cl. G11B5 60

**PURPOSE:** To reduce cost by constituting a magnetic head by directly sticking a core slider to a printed circuit board and connecting coil terminals of its conductive pattern.


**CONSTITUTION:** A core slider 10 in which a head core 12 is incorporated is directly stuck to a printed circuit board 18 on which a conductive pattern 20 for relay of coil terminals is formed, and terminals of coils 22 and 24 wound around the leg part of the head core 12 are connected to the conductive pattern 20 so that they can be mounted on the front end part of a carriage arm as they are. By this constitution, a common module is used in side 0 and side 1 of a magnetic head and coil terminals are arranged and held on the printed circuit board. Thus, the cost of materials and the man-hour for assembling are reduced or the cost of management is reduced by the common use of members.

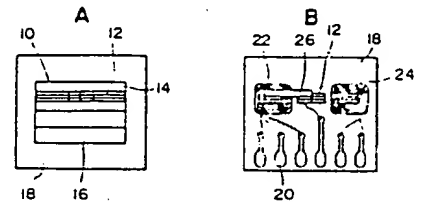


第 1 図




第 2 図



第 3 図



第 4 図

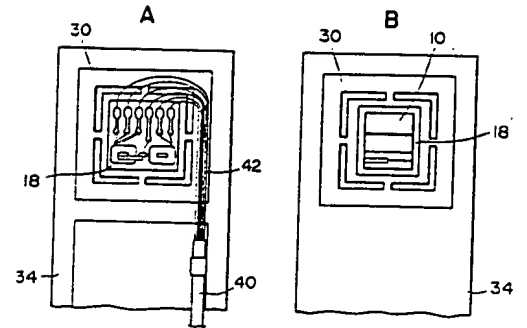

第 5 図

